


IS*T Isolator

Features

- Design for preventing surge and lightning stroke.
- Good RF noise proof features.
- Wideband, low insertion loss and high reliability.
- “F” connector.

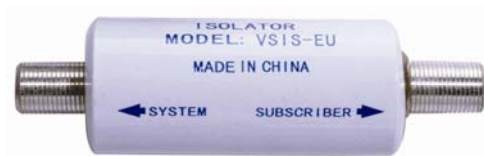

Model Number system

IST — EU
 └─── According to European standard

Specifications

Item	IST-EU			Unit
Frequency range	5~10	10~550	550~862	MHz
Insertion loss	≤0.5	≤0.7	≤1.5	dB
Return loss	≥14	≥16	≥14	dB
Shielding index	≥65			dB
Isolation voltage	2000 (last for 60s)			V(AC)
Impedance	75			Ω
Dimension	24.0×82.0 (D×L)			mm