


# SY User terminal box

## Features

- Die-casting Zinc-alloy crust with tin-cerium-alloy plated.
- 120dB RF shielded, excellently conducted and anti-corrosive.
- “F” connector.
- Wideband, low insertion loss and high reliability.



## Model Number system

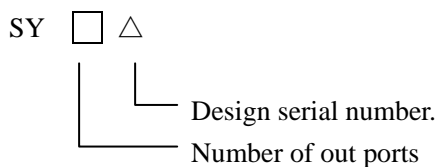

## Specifications

Item	single pore (SY1A)	Double pore (SY2D)	Unit
Frequency range	5~1000	5~1000	MHz
Insertion loss			
TV port	≤0.5	≤1.5	dB
FM port	—	≤11.0	dB
Isolation		≥25	dB
Return loss			
IN port	≥16	≥16	dB
TV port	≥16	≥16	dB
FM port	—	≥16	dB
Isolation voltage	1000	1000	V(AC)