


TMS*A TV/CableModem Splitter

Feature

- Zinc-alloy die-casting case with tin-cerium-alloy plated.
- 120dB RF anti-jamming, excellent conducted and anti-corrosive.
- “F” connector.
- Wideband, low insertion loss and high reliability.



Model Number system

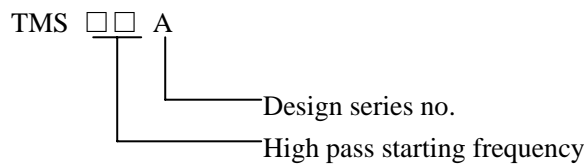

Specifications

Item				Unit
Frequency range	5~65(30,42)	85(47,54) ~100	100~862	MHz
Insertion loss				
TV port	≥45	≤4.5	≤4.5	dB
MODEM port	≤3.5	≤3.5	≤3.8	dB
Isolation	≥28	≥28	≥26	dB
Return loss				
IN port	-	≥17	≥17	dB
TV port	-	≥17	≥17	dB
MODEM port	≥17	≥17	≥17	dB
Dimension	19×69×80			mm